



● Specification:


Model	MSR-A2410B	MSR-B1210B	MSR-C0910B
Frequency (PLL) MHz	2413,2432 2451,2470	1080,1120 1160,1200	910,980 1010,1040
Frequency Deviation	200kHz		
Video Input	1Vp-p 75 ohm		
Audio Input	2Vp-p 10k ohm		
Audio Sub Carrier	5.5MHz		
Operating Voltage	DC 12V		
Operating Carrier	350mA		
Operating Temperature	-10 ~ 40 Degrees C		
Operating Humidity	20 ~ 80%		
Dimension (mm)	114X80X20		
Weight (g)	800		

Model	MRX-2400B	MRX-1200B	MRX-0900B
Channel Frequency (MHz)	2413,2432 2451,2470	1080,1120 1160,1200	910,980 1010,1040
Video Input	1 Vp-p Composite Video		
Audio Input	2 Vp-p (max)		
Audio Sub Carrier	5.5MHz		
Operating Voltage	DC 5 V		
Power Current	360mA		
Batter Charge Time	2.5Hrs		
Operating Temperature	-10~40 Degree C		
Operating Humidity	20~80%		
Dimensions	110mmx67mmx21.5mm		
Weight	117g		

● Dimension:


MSR-(A2410,B1210,C0910)B

- 2.4GHz Wireless receiver + auto-switcher + metal housing.
- Receivers can be adjusted to mute mode or changed intervals of scanning.
- Receivers will automatically receive new signals from any one of newly added cameras. Producing clear audio affect and stable video effect.
- Being able to hooked up to 4 cameras and sending signals simultaneously.

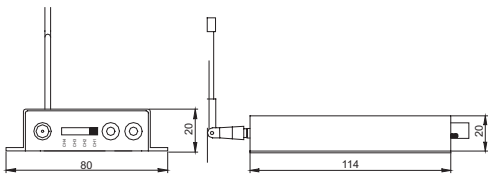

MRX-(2400,1200,0900)B

- Receivers will automatically receive new signals from any one of newly added cameras. Producing clear audio affect and stable video effect.
- Receivers can be adjusted to mute mode or changed intervals of scanning.
- POWER:Li-Ion Rechargeable Battery or DC 5 V
Using compatible Nokia cell phone battery BL-5C
- 2.4GHz Wireless receiver + auto-switcher + metal housing.
- 4CH & Auto Switcher
- Low Power & channel LED Display

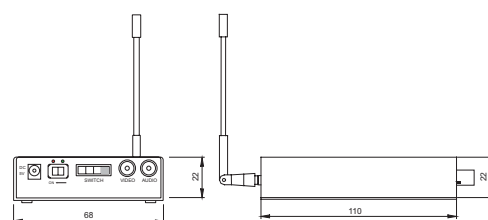

● Receiver:



MSR-(A2410,B1210,C0910)B



MRX-(2400,1200,0900)B

● Instruction Drawing (Example for wireless):

