

# UL 2.8 - 6

6V 2.8AH

STANDBY


# Ultrace//<sup>®</sup>

'Quality in Every Language'


Image



Terminal Type

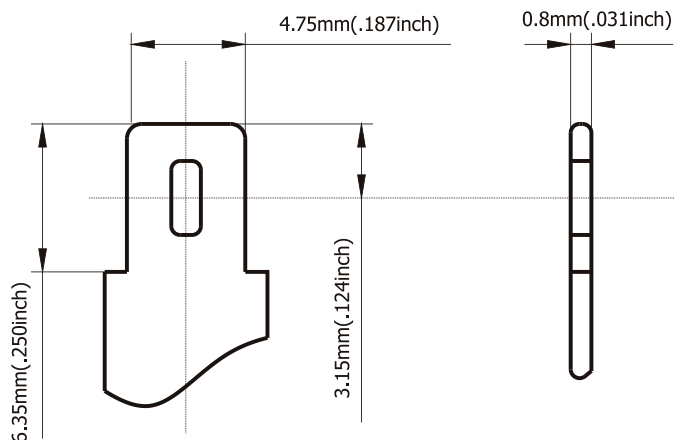

Dimensions

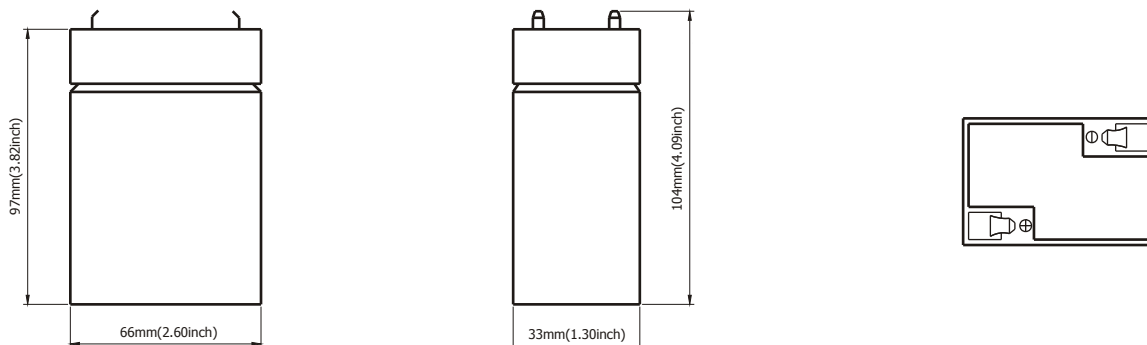

Specifications

Battery Model	UL 2.8 - 6			
Designed Floating Life	5 Years			
Capacity (25°C)	20HR (0.14A, 1.75V)	10HR (0.266A, 1.75V)	5HR (0.476A, 1.75V)	1HR (1.68A, 1.55V)
	2.8AH	2.66AH	2.38AH	1.68AH
Dimensions	Length	Width	Height	Total Height
	66mm	33mm	97mm	104mm
Approx. Weight	0.61Kg			
Internal Resistance	Fully Charged at 25°C 0.038 Ohm			
Self Discharge	3% of capacity declined per month at 25°C			
Capacity Affected by Temperature	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage (25°C)	Cycle Use		Float Use	
	7.2 - 7.5V (-12mV/C), max. Current: 0.84A		6.75 - 6.9V (-9mV/C)	

Construction

Component	Raw material	Sealant	Epoxy Resin
Positive	Lead dioxide	Safety Valve	EPDR
Negative	Lead	Terminal	Copper
Container	ABS (Flame Retardant optional)	Separator	Fibre Glass
Cover	ABS (Flame Retardant optional)	Electrolyte	Sulphuric acid
<i>Sealed and maintenance free option</i>		<i>Non-spillable construction design</i>	

# UL 2.8 - 6


6V 2.8AH

STANDBY


# Ultrace//<sup>®</sup>

'Quality in Every Language'


## Charge Characteristic

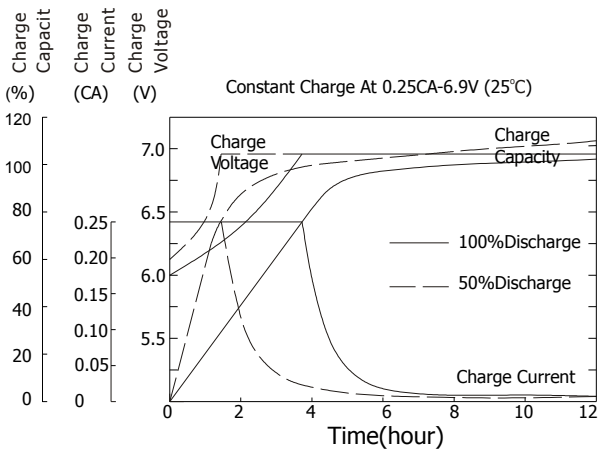


## Discharge Characteristic 25°C

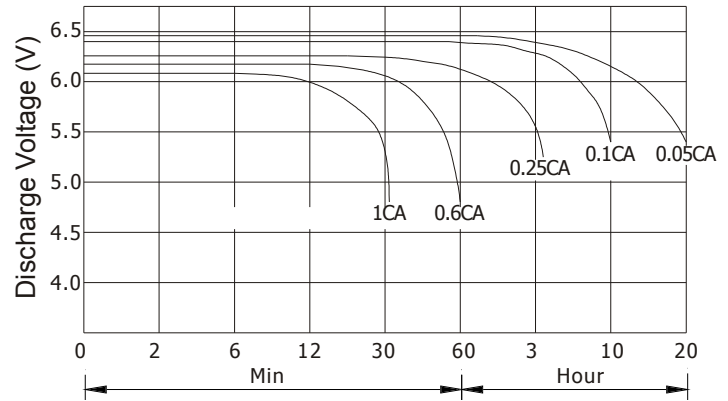

## Relationship of OCV and state of charge

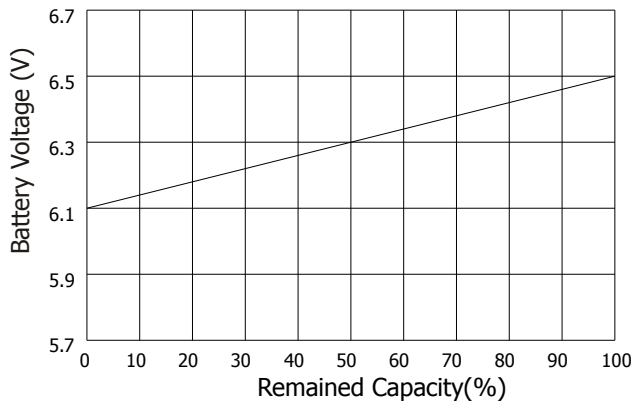

## Self Discharge Characteristics

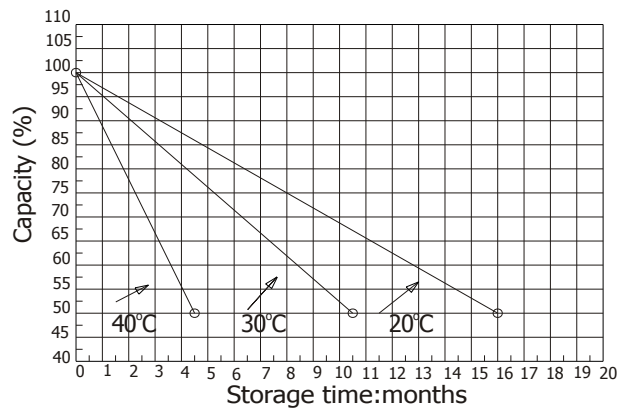

## Constant Current Discharge Ratings - amperes at 25°C

F.V / Time	5 MIN	10 MIN	15 MIN	30 MIN	1 HR	3 HR	5 HR	10 HR	20 HR
1.60 V	10.97	6.81	5.14	3.15	1.68	0.75	0.54	0.30	0.16
1.67 V	10.31	6.49	5.02	3.01	1.67	0.73	0.52	0.28	0.15
1.70 V	9.44	6.31	4.86	2.76	1.66	0.70	0.49	0.27	0.15
1.75 V	9.26	6.10	4.72	2.54	1.66	0.70	0.47	0.27	0.14
1.80 V	8.28	5.74	4.26	2.40	1.65	0.69	0.47	0.27	0.14
1.85 V	7.25	5.45	3.79	2.24	1.65	0.68	0.47	0.26	0.13

## Constant Power Discharge Ratings - watts at 25°C

F.V / Time	5 MIN	10 MIN	15 MIN	30 MIN	1 HR	3 HR	5 HR	10 HR	20 HR
1.60 V	20.20	13.98	10.66	6.48	3.46	1.56	0.96	0.55	0.31
1.67 V	19.90	13.95	10.60	6.42	3.44	1.54	0.95	0.55	0.30
1.70 V	19.48	13.88	9.89	6.38	3.41	1.53	0.95	0.54	0.30
1.75 V	19.15	13.80	9.85	6.27	3.37	1.47	0.94	0.54	0.30
1.80 V	17.43	12.56	9.32	6.12	3.34	1.44	0.93	0.53	0.29
1.85 V	15.80	12.35	9.28	5.89	3.32	1.42	0.93	0.53	0.29