

# UCG 20 - 12

12V 20AH

AGM GEL


# Ultrace//<sup>®</sup>

'Quality in Every Language'




Image



Terminal Type

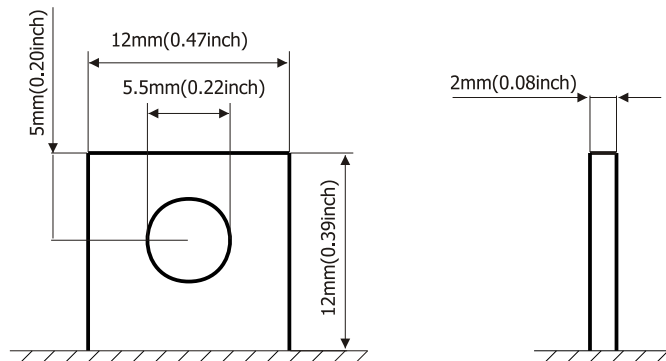

Dimensions

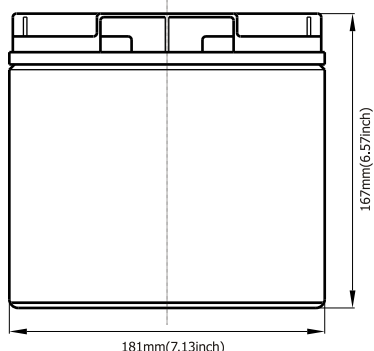

Specifications

Battery Model	UCG 20 - 12			
Designed Floating Life	10 Years			
Capacity (25°C)	20HR (1.1A, 1.75V)	10HR (2.0A, 1.75V)	5HR (5.61A, 1.75V)	1HR (13.2A, 1.6V)
	22AH	20.5AH	18.7AH	13.2AH
Dimensions	Length	Width	Height	Total Height
	181mm	77mm	167mm	167mm
Approx. Weight	6.0Kg			
Internal Resistance	Fully Charged at 25°C 0.013 Ohm			
Self Discharge	3% of capacity declined per month at 25°C			
Capacity Affected by Temperature	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage (25°C)	Cycle Use		Float Use	
	14.0-15.0V (-24mV/C), max. Current: 6.0A		13.6-13.8V (-18mV/C)	

Construction

Component	Raw material	Sealant	Epoxy Resin
Positive	Lead dioxide	Safety Valve	EPDR
Negative	Lead	Terminal	Copper
Container	ABS (Flame Retardant optional)	Separator	Fibre Glass
Cover	ABS (Flame Retardant optional)	Electrolyte	Sulphuric acid and Gel

*Sealed and maintenance free option*      *Non-spillable construction design*

# UCG 20 - 12


12V 20AH

AGM GEL


# Ultrace//<sup>®</sup>

'Quality in Every Language'


## Charge Characteristic

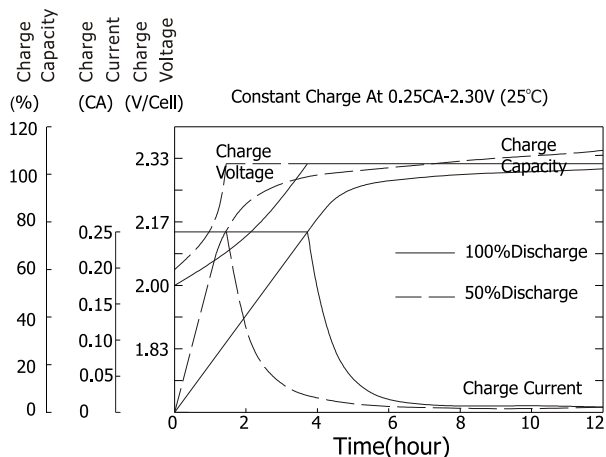

## Discharge Characteristic 25°C

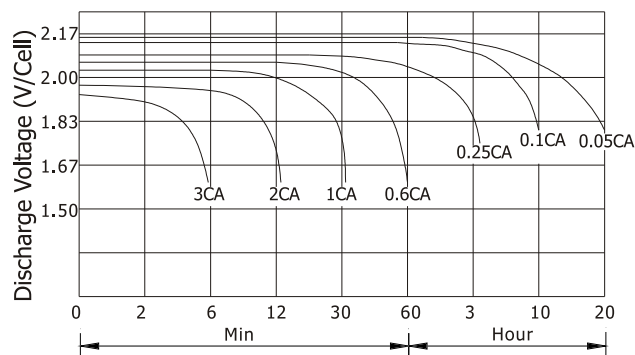

## Relationship of OCV and state of charge

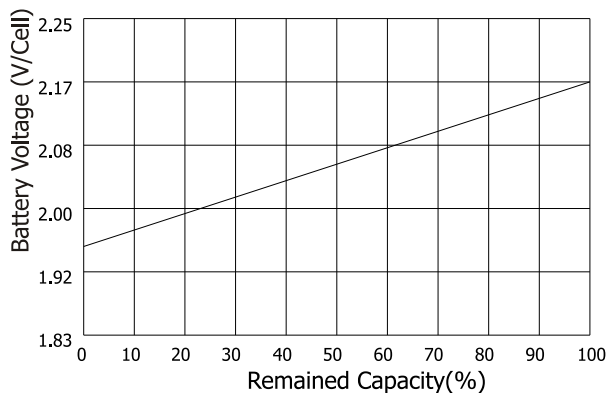

## Life Expectancy Cycle Use:

- 100% depth of discharge 350 cycles
- 80% depth of discharge 600 cycles
- 50% depth of discharge 900 cycles
- 30% depth of discharge 1500 cycles
- 20% depth of discharge 1700 cycles

## Constant Current Discharge Ratings - amperes at 25°C

F.V / Time	5 MIN	10 MIN	15 MIN	30 MIN	1 HR	3 HR	5 HR	10 HR	20 HR
1.60 V	77.4	48.1	36.3	22.1	14.1	6.18	3.78	2.03	1.11
1.67 V	72.6	45.7	34.9	21.2	13.9	5.94	3.70	2.01	1.07
1.70 V	66.5	44.0	34.1	19.3	13.5	5.54	3.62	2.00	1.06
1.75 V	65.2	42.6	33.0	18.3	12.8	5.36	3.54	1.97	1.03
1.80 V	58.3	40.7	30.0	16.9	12.0	5.15	3.33	1.95	1.00
1.85 V	51.5	38.8	27.0	15.6	11.2	4.96	3.12	1.92	0.97

## Constant Power Discharge Ratings - watts at 25°C

F.V / Time	5 MIN	10 MIN	15 MIN	30 MIN	1 HR	3 HR	5 HR	10 HR	20 HR
1.60 V	135	86.5	65.9	39.7	25.3	10.9	6.35	4.20	2.21
1.67 V	130	84.3	65.1	38.9	25.1	10.6	6.32	4.18	2.13
1.70 V	123	83.5	64.6	36.4	24.6	10.1	6.24	4.15	2.10
1.75 V	123	83.2	64.0	35.3	24.2	9.85	6.18	4.10	2.05
1.80 V	113	82.0	59.4	33.7	22.8	9.56	5.99	4.05	2.00
1.85 V	102	77.7	53.8	31.5	21.5	9.27	5.80	3.99	1.92